

## 5.2




**Rueda:**  
Inyección Poliamida

**Acabado:**  
Con carga Fibra Vidrio

**Pisada:**  
Semi-Abalonada

**Rodamiento:**  
Eje/Buje Liso

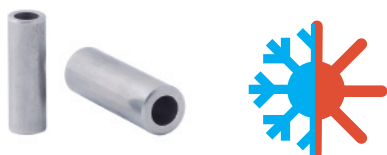

# 188/FV

## Serie Fibra Vidrio

de 200 a 800 Kgs.



-40°C +150°C

80/84 Shore D	-40°C/+150°C

80	32	39	12	30515	188/80 FV	200
100	35	45	15	30580	188/100 FV	250
130	40	45	15	30590	188/130 FV	400
160	45	60	20	30596	188/160 FV	600
200	50	60	20	30556	188/200 FV	800

### SERIES

201/200/204 - pág. 121

284/285/286 - pág. 126

